


Gully tops for ACO hygienic gully 157 - telescopic

Product information

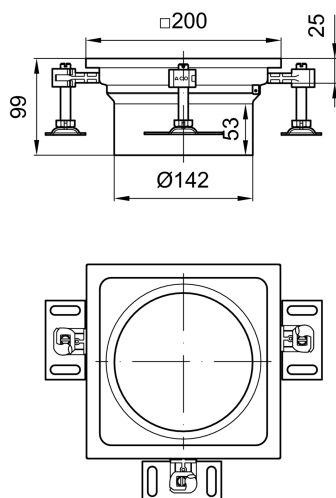

ACO Product benefits

- Fully inspectable and cleanable
 - Internal radii equal or larger than 3 mm
 - Fully welded hygienic joints
 - Steel thickness min. 1,5 mm
 - Edge infill
 - ACO protective cover available
 - Fully pickled and passivated
- Hygienic design following EN 1672, EN ISO 14159 and EHEDG document 8, 13 and 44
 - Certified according to EN 1253-1
 - Available in 1.4301 (304) or 1.4404 (316L) grades of stainless steel
 - Gully top size 200 x 200 mm or 250 x 250 mm
 - Adjustable EasyFix levelling feet
 - Wide range of gratings for load classes L 15, R 50, M 125 or N 250 (EN 1253-1) including slip resistant solutions
 - Silt basket available as accessory

Item Technical Data 408208

Description	Version
Standard edge	1.4301